



Company Wifi




Company user

User is able to ping Anybus 10.10.41.18
User is not able to ping Ewon
(10.10.41.18) and PLC (10.10.41.20)




AnyBus Bolt

Acting as Access point for EWON to connect to company Wifi.
Eg. Static IP : 10.128.42.116
WAN IP : 10.10.41.18

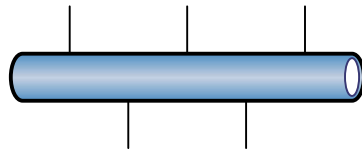

EWON Cosy 131
EWON connected to Anybus through ethernet cable in port 2.
Eg. Static IP : 10.128.43.116
WAN IP : 10.10.41.19
LAN IP : 192.168.0.2



Siemens PLC
PLC from which data is to be read by company user connected over WAN
Eg. Static IP : 10.128.44.116
WAN IP : 10.10.41.20
LAN IP : 192.168.0.1

Ethernet WAN connection settings

IP address : 10.128.43.116
Subnet Mask : 255.255.255.0
Default Gateway : 10.128.42.1

Routing Setup NAT 1:1

PLC device IP(LAN) : 192.168.0.1
Mapped IP (WAN) : 10.128.44.116